




Hover Mower Series

UFO Mower Series



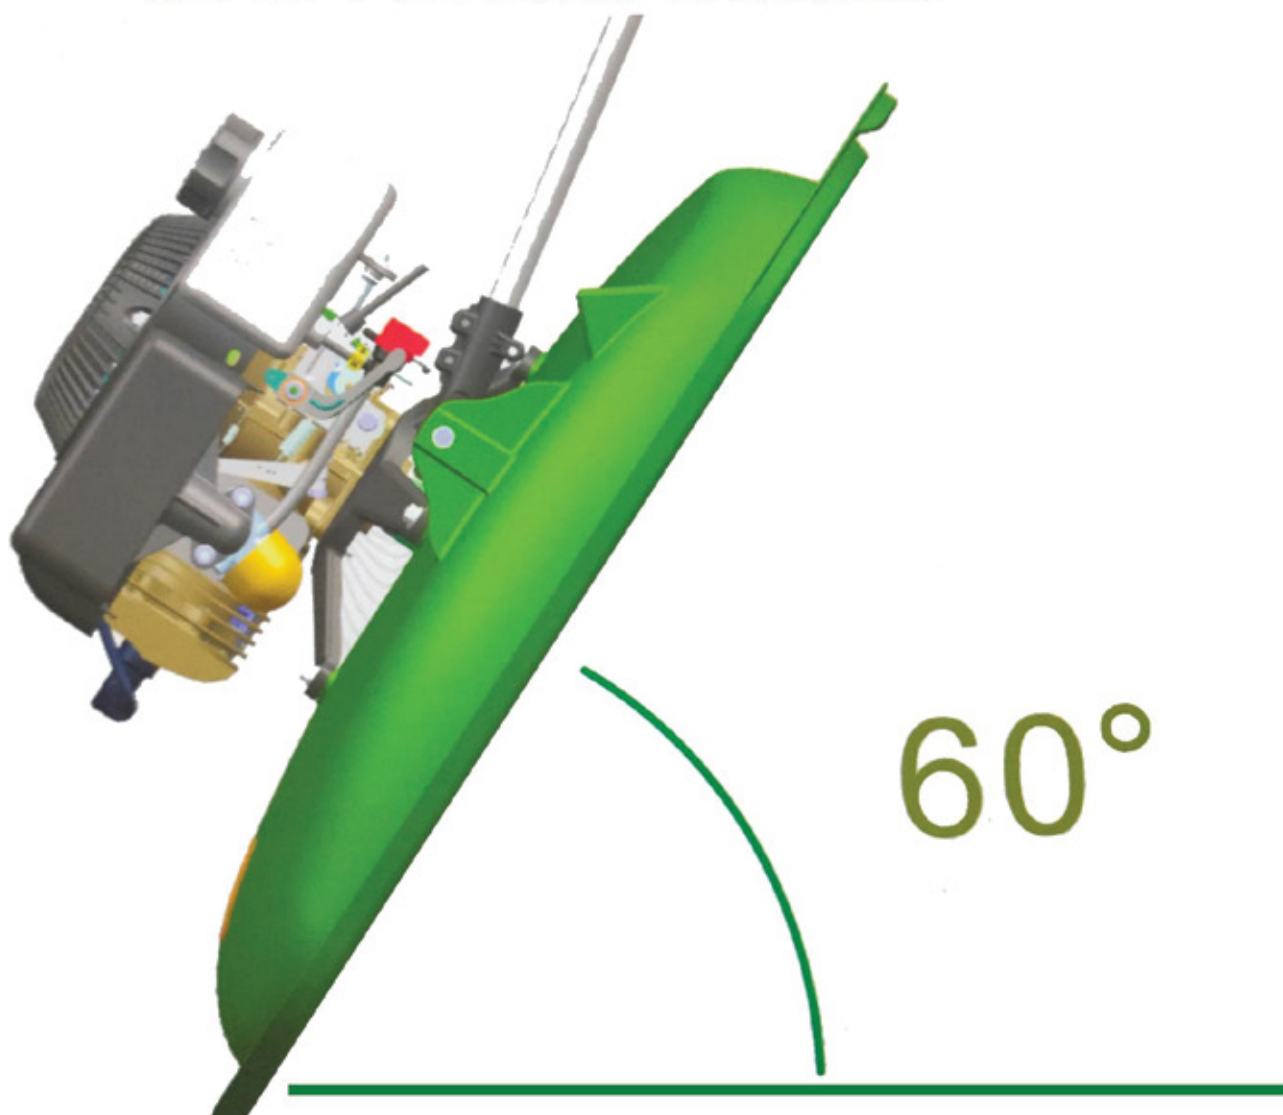

QF480 Hover Mower



- Hover mower model: QF480
- Engine: JAYU JN120
- Type: Air-cooling 2-stroke
- Displacement(cc): 121.5
- Speed(rpm): 3800
- Fuel tank capacity(L): 1.6
- Cylinder sleeve: Cast iron cylinder sleeve
- Gasoline/Oil: 25:1
- Air Cleaner: Paper filter
- Cutting height(mm/inch): 15-50/0.6-2
- Cutting height with Hi-rise kit (mm/inch): 45-85/2-3.5
- Cutting width (mm/inch): 483/19
- Max. working slope (degree): 60
- Packing dimension (mm): 770*620*450
- N.W/G.W (kg): 15.2/18.7
- 20'/40' GP Loading: 105/225



High strength piston




Cast iron cylinder sleeve


JAYU JN120

2-Stroke Engine

Fine mesh design to keep out grass clippings

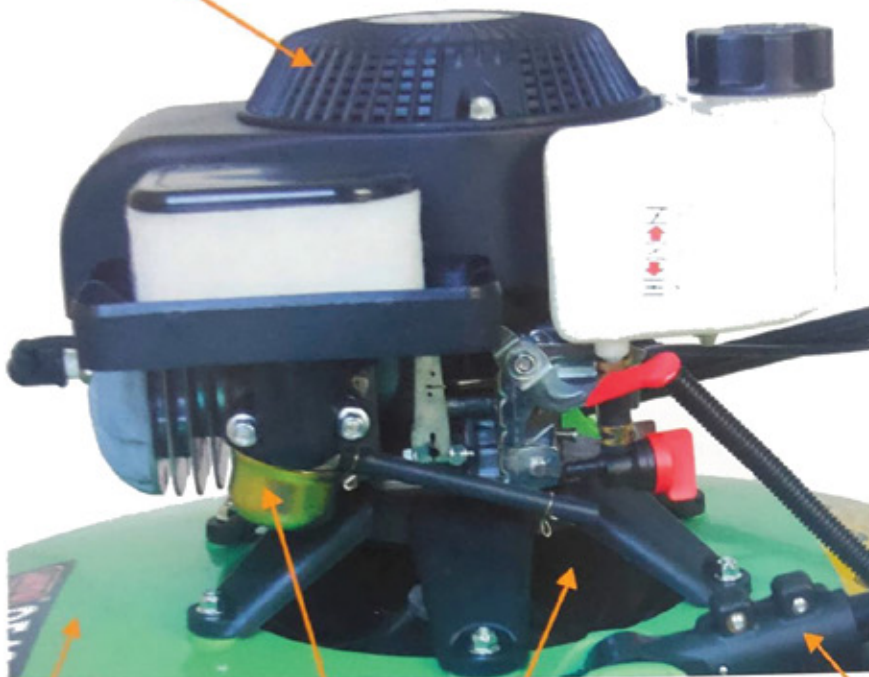

Twin Cutter Blade



Bar Blade

Wearproof nylon deck

A large air intake will prevent leaves and grass clippings from clogging

Max working slope 60 degree



Handle shock absorber

Wheel kit



Hi-rise kit





QF150 Hover Mower



- Hover mower model: QF150
- Engine: DOCAR DVO150
- Type: Air-cooling 4-stroke
- Displacement(cc): 150
- Speed(rpm): 3600
- Fuel tank capacity(L): 0.9
- Oil capacity(L): 0.5
- Air Cleaner: Paper filter
- Cutting height(mm/inch): 15-50/0.6-2
- Cutting height with Hi-rise kit (mm/inch): 45-85/2-3.5
- Cutting width (mm/inch): 483/19
- Max. working slope (degree): 45
- Packing dimension (mm): 770*620*450
- N.W/G.W(kg): 14.7/18.2
- 20'/40' GP Loading: 105/225

EAPIII Engine




DOCAR DVO150

4-Stroke Engine



Professionally designed integrated engine

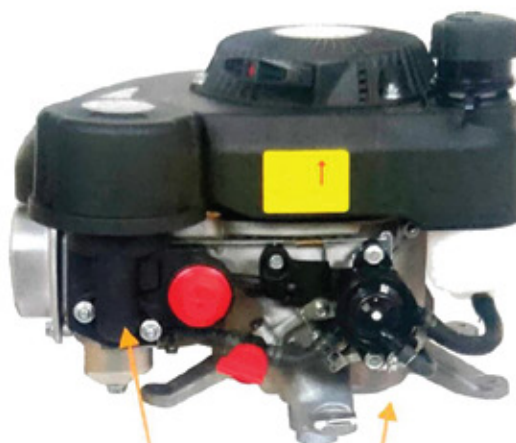

Superior performance durable air filters

A large air intake will prevent leaves and grass clippings from clogging



Twin Cutter Blade



Bar Blade



Silicon carbide piston: with high hardness, excellent wear resistance, high heat resistance properties



Handle shock absorber



Wheel kit



Hi-rise kit



UFO-17

UFO Mower



- Hover mower model: UFO-17
- Engine: JAYU JN80
- Type: Air-cooling 2-stroke
- Displacement(cc): 78.5
- Speed(rpm): 4800
- Fuel tank capacity (L): 1.2
- Cylinder sleeve: Cast iron cylinder sleeve
- Gasoline/Oil: 25:1
- Air Cleaner: Paper filter
- Cutting height(mm/inch): 20-56/0.8-2.4
- Cutting height with Hi-rise kit (mm/inch): 45-80/2-3
- Cutting width (mm/inch): 430/17
- Max. working slope (degree): 89
- Packing dimension (mm): 770*570*300*
- N.W/G.W(kg): 12.2/15.5
- 20'/40' GP Loading: 196/392

EAPIII Engine




Cast iron cylinder sleeve

JN80 2-STROKE ENGINE



Twin Cutter Blade



Bar Blade



String Blade

Cooling air inlet

**Installation compartment
for High Voltage Coil,
Ignitor & Stator**



Hi-rise kit



Handle shock absorber



UFO-15 UFO Mower



- Hover mower model: UFO-15
- Engine: JAYU JN60
- Type: Air-cooling 2-stroke
- Displacement(cc): 63.3
- Speed (rpm): 5000
- Fuel tank capacity (L): 1.5
- Gasoline/Oil: 25:1
- Air Cleaner: Paper filter
- Cutting height(mm/inch): 15-50/0.6-2
- Cutting height with Hi-rise kit (mm/inch): 45-80/2-3
- Cutting width (mm/inch): 380/15
- Max working slope (degree): 89
- Packing dimension (mm): 730*520*320*
- N.W/G.W(kg): 10.2/13
- 20'/40' GP Loading: 245/497


EPAIII Engine




JN60 2-STROKE ENGINE



Twin Cutter Blade

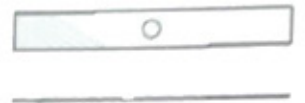

Bar Blade

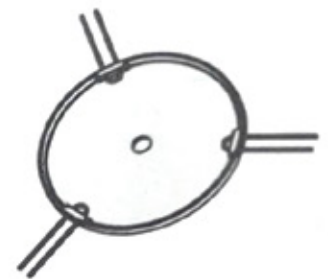

Bar Blade



Hi-rise kit



Handle shock absorber



QC400

Edge Trimmer




- Edge trimmer model: QC400
- Engine: Mitsubishi GT400
B&S I/C 0831
- Type: Air-cooled 4-stroke
- Displacement(cc): 126
- Speed (rpm): 3600
- Fuel tank capacity (L): 2.5
- Working depth (mm): 40
- Working width (mm): 250
- Size(mm): 650*510*480
- N.W/G.W(kg): 31.6/35.4
- 20'/40' Loading: 128/288



Safety device



Cast steel
knife rest

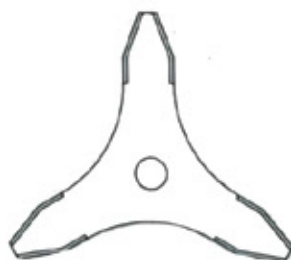

Φ250*Φ25.4*2.8



MD200

Back lapper



- Back lapper model: MD200
- Output power(W): 200
- Frequency (Hz): 50/60
- Volts(V): 220
- Amps (A): 1.6/1.8
- Operation temperature(): 90
- Motor speed (rpm): 1420/1720
- Ratio: 14:1
- Output speed(rpm): 96/50Hz
- N.W/G.W(kg): 10.2/13
- 20'/40' GP Loading: 198/414





SFQ-B50 Fertilizer Spreader

- Fertilizer spreader model: SFQ-B50
- Hopper capacity (L): 50
- Spreading radius(M): 1-3
- Tire model: 4.1*3.5-6 Nylon spoke
- Stander: SUS
- N.W/G.W(kg): 13.8/16.1
- Size(mm): 680*550*540
- 20'/40' Loading: 120/252





SFQ-25

Fertilizer Spreader



- Fertilizer spreader model: SFQ-25
- Hopper capacity (L): 25
- Spreading radius(M): 1-3
- Tire model: $\phi 270 \times 80$ Plastic spoke
- Stander: SUS
- N.W/G.W(kg): 7.6/10.8
- Size(mm): 650*550*480
- 20'/40' Loading: 120/252



YUTTHAPHONG WONGWAT

BUSINESS MANAGER

 (+84) 913 392 405

 2 Alley 14, Lane 104 Dao Tan
Cong Vi Ward, Ba Dinh Distric

 yutthaphong2021@gmail.com
siamvinagolf@gmail.com